

# CMA614/0.20

## 6 CORE STRANDED BARE COPPER CABLE



### Security Cable

#### Overview

Dynamic Cable Solutions range of security and data cable has been manufactured and compliance tested to meet Australian standards. Our cable is 100% bare copper and features count down meter marking to ensure you know how much cable is left in your box. 1 - 10 individual markings on the sheath to assist with easy cable identification and fitted on a pull reel in the box for convenience.


#### Part Code

#### Description

CMA614020

Dynamic Cable Solutions 6 Core 14/0.20 - 300m Box, White

#### Construction

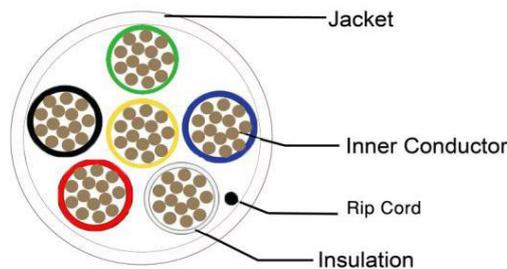

#### Physical Structure

1.1	Conductor Diameter	14x0.20 ± 0.003mm
1.2	Conductor Material	Stranded Bare Copper
1.3	Insulation	PVC
1.4	Insulation Material Colour	Red, Blue, White, Black, Green, Yellow
1.5	Jacket Colour	White
1.6	Jacket O.D.	5.6 ± 0.2mm
1.7	Jacket Material	75°C Flame Retardant PVC
1.8	Jacket Thickness	0.55 ± 0.05mm

#### Test Standards

AS/CA S008:2020

Flame retardancy to AS/NZS IEC 60332.1.

#### Distributed by LSC

[dynamiccable.com.au](http://dynamiccable.com.au)

##### Victoria [HQ]

140-158 Dryburgh Street  
North Melbourne, VIC 3051

p 03 9329 7222  
f 03 9329 2570  
e vic@lsc.com.au

##### New South Wales

44 Skarratt Street  
Silverwater, NSW 2128

p 02 9647 8111  
f 02 9647 8100  
e nsw@lsc.com.au

##### Queensland

15-17 Jeays Street  
Bowen Hills, QLD 4006

p 07 3252 1056  
f 07 3252 1087  
e qld@lsc.com.au

##### South Australia

333 Halifax Street  
Adelaide, SA 5000

p 08 8223 2999  
f 08 8223 1777  
e sa@lsc.com.au

##### Western Australia

9 Brennan Way  
Perth, WA 6104

p 08 9328 7488  
f 08 9227 7363  
e wa@lsc.com.au