

CMA714/0.20

7 CORE SHIELDED BARE COPPER CABLE



Dynamic
Cable Solutions

Security Cable

Overview

Dynamic Cable Solutions range of security and data cable has been manufactured and compliance tested to meet Australian standards. Our cable is 100% bare copper and features count down meter marking to ensure you know how much cable is left in your box. 1 - 10 individual markings on the sheath to assist with easy cable identification and fitted on a pull reel in the box for convenience.


Part Code

Description

CMA714020250

Dynamic Cable Solutions Shielded 7 Core 14/0.20 - 250m Reel, Grey

Construction

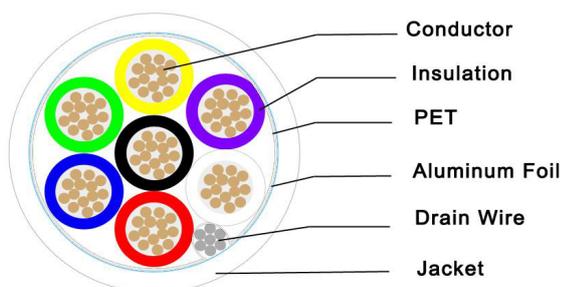

Physical Structure

1.1	Conductor Diameter	14x0.20 ± 0.003mm
1.2	Conductor Material	Stranded Bare Copper
1.3	Insulation Radial Thickness	PVC, 0.35mm
1.4	Insulation Material Colour	Red, Blue, White, Black, Green, Yellow, Purple
1.5	Overall Screen	Overall Aluminium/Polyester Laminate Tape
1.6	Drain Wire	7/0.20 ± 0.003mm Stranded Tinned Copper
1.7	Jacket Colour	Grey
1.8	Jacket O.D.	6.2 ± 0.2mm
1.9	Jacket Material	75°C Flame Retardant PVC
1.10	Jacket Thickness	0.70 ± 0.05mm

Test Standards

AS/CA S008:2020

Flame retardancy to AS/NZS IEC 60332.1.

Distributed by LSC

dynamiccable.com.au

Victoria [HQ]

140-158 Dryburgh Street
North Melbourne, VIC 3051

p 03 9329 7222
f 03 9329 2570
e vic@lsc.com.au

New South Wales

44 Skarratt Street
Silverwater, NSW 2128

p 02 9647 8111
f 02 9647 8100
e nsw@lsc.com.au

Queensland

15-17 Jeays Street
Bowen Hills, QLD 4006

p 07 3252 1056
f 07 3252 1087
e qld@lsc.com.au

South Australia

5 W Thebarton Road
Thebarton, SA 5031

p 08 8223 2999
f 08 8223 1777
e sa@lsc.com.au

Western Australia

9 Brennan Way
Perth, WA 6104

p 08 9328 7488
f 08 9227 7363
e wa@lsc.com.au