

FIGURE 8 14/24 0.20

SECURITY CABLE STRANDED BARE COPPER



General Purpose Low Voltage Cable

Overview


Dynamic Cable Solutions range of security and data cable has been manufactured and compliance tested to meet Australian standards. Our cable is 100% bare copper and features count down meter marking to ensure you know how much cable is left in your box. 1 - 10 individual markings on the sheath to assist with easy cable identification and available on a 100m reel.

Part Code

Description

CMF8140201	Dynamic Cable Solutions Figure 8 14/0.20 - 100m Reel, White
CMF8240201	Dynamic Cable Solutions Figure 8 24/0.20 - 100m Reel, White

Construction

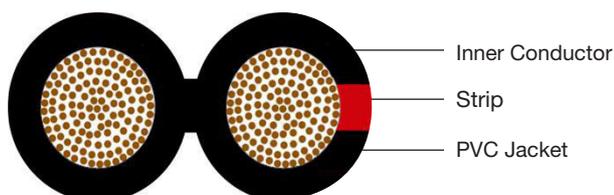

Physical Structure

	F814	F824	
1.1	Conductor Diameter	14x0.20 ± 0.003mm	24x0.20 ± 0.003mm
1.2	Conductor Material	Stranded Bare Copper	
1.3	Jacket Colour	White (Black Strip)	
1.4	Jacket O.D.	2.25*4.90 ± 0.15mm	2.20*4.80 ± 0.15mm
1.5	Jacket Material	75°C PVC	

Test Standards

AS/CA S008:2020

Flame retardancy to AS/NZS IEC 60332.1.

Distributed by LSC

dynamiccable.com.au

Victoria [HQ]

140-158 Dryburgh Street
North Melbourne, VIC 3051

p 03 9329 7222
f 03 9329 2570
e vic@lsc.com.au

New South Wales

44 Skarratt Street
Silverwater, NSW 2128

p 02 9647 8111
f 02 9647 8100
e nsw@lsc.com.au

Queensland

15-17 Jeays Street
Bowen Hills, QLD 4006

p 07 3252 1056
f 07 3252 1087
e qld@lsc.com.au

South Australia

333 Halifax Street
Adelaide, SA 5000

p 08 8223 2999
f 08 8223 1777
e sa@lsc.com.au

Western Australia

9 Brennan Way
Perth, WA 6104

p 08 9328 7488
f 08 9227 7363
e wa@lsc.com.au