

# MODIFIED FAIL SAFE/FAIL SECURE CHANGEOVER PROCEDURE

Remove the rear cover plate.



Loosen the 2 Phillips head screws that hold the changeover mechanism.

Insert the supplied flat blade into the centre of changeover mechanism.

Rotate 90 degree counter clockwise.

Tighten the 2 Phillips head screws that hold the change over mechanism.

Replace the rear cover plate.

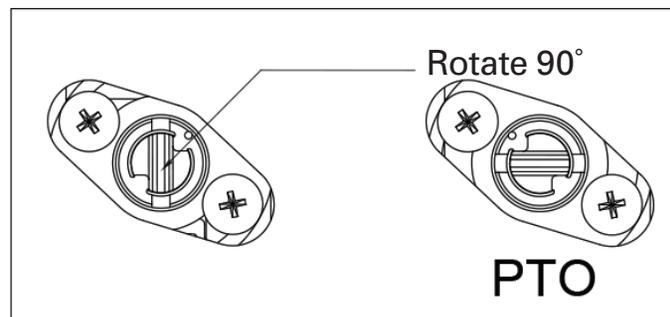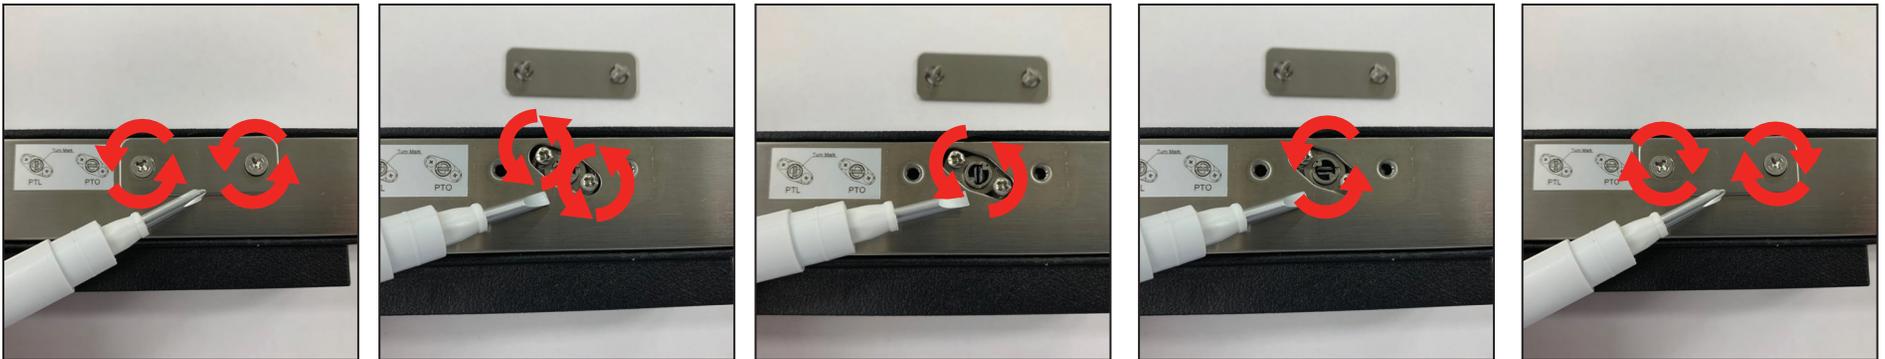

**LOX**  
LOCKING

LOX LOCKING PTY LTD  
UNIT 7 / 76 RESERVE RD  
ARTARMON NSW 2064