



STRIKE BODY

Ver.5.01

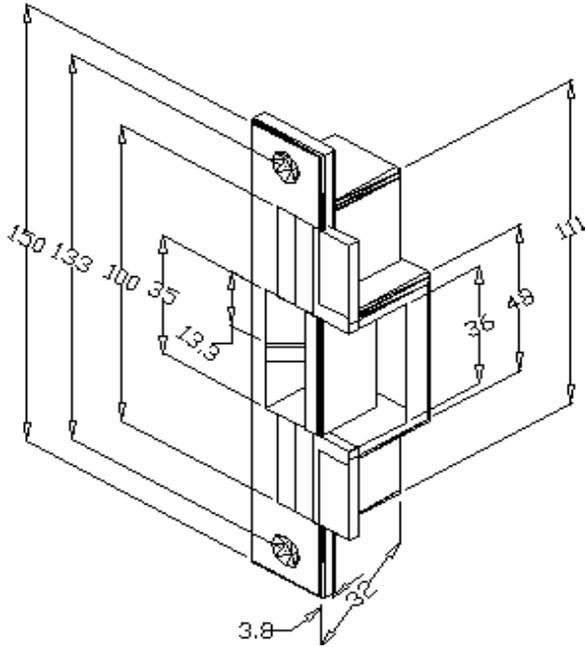


PGS-701A
 PGS-702A

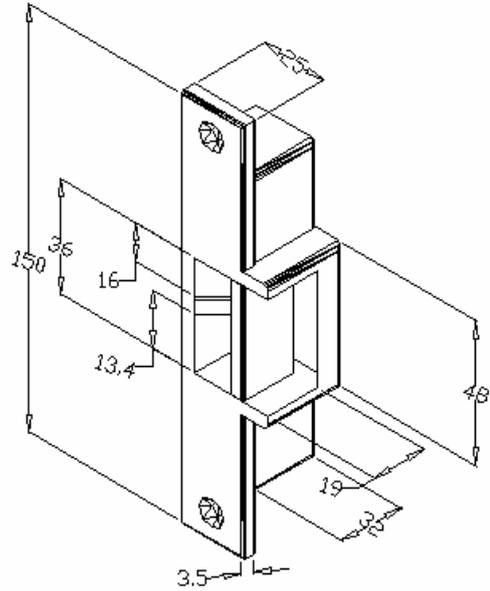


PGS-701B / PGS-702B
 PGS-703 / PGS-704

MECHANICAL DIMENSION IN mm


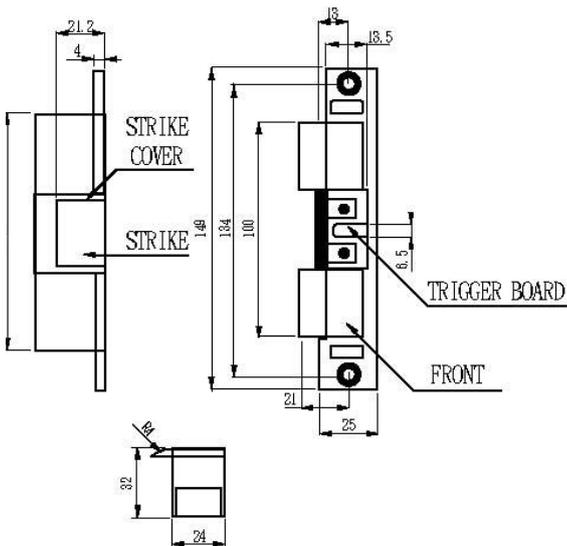


PGS-701A
 PGS-702A

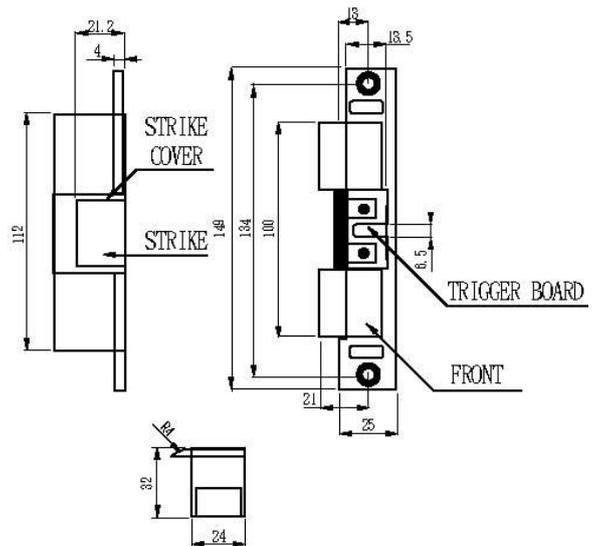


PGS-701B / PGS-702B
 PGS-703 / PGS-704

INSTALLATION EXAMPLE

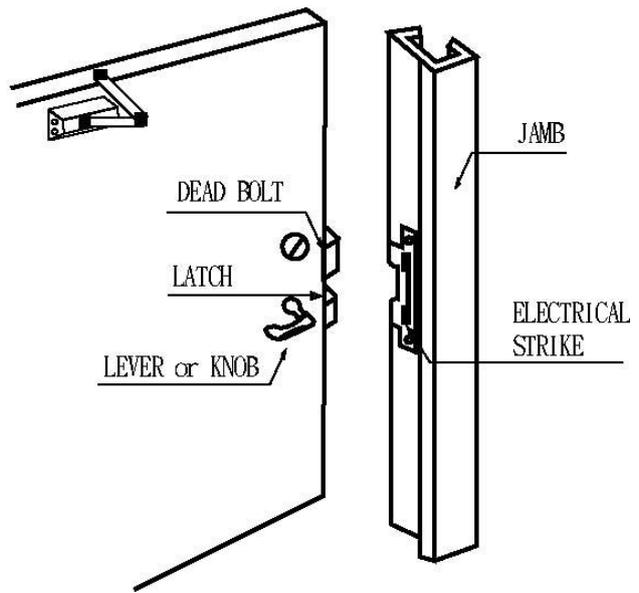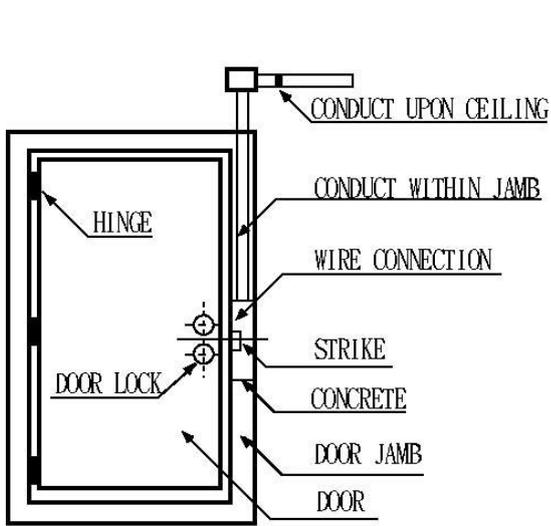

WIRING DIAGRAM

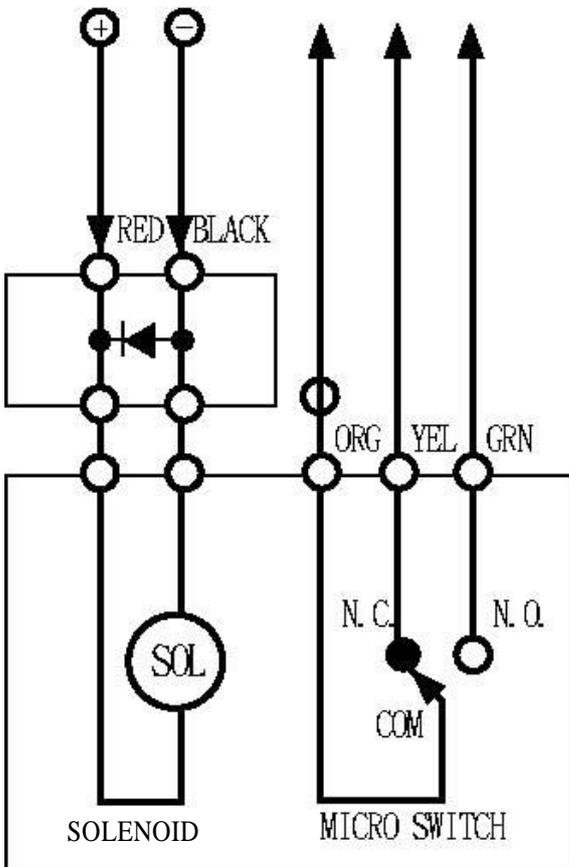

Because the voltage drop will result in being unable to drive the solenoid coil. Therefore, please make sure the thickness of the wire and the distance of the wiring, the voltage supply is good enough for normal operation.

Electrical Specification :

- Voltage / Current (DC) : DC 12V 120mA ±10%
- Solenoid : Continuous duty
- Status Sensors : Micro switch of maximum DC 12V 2A

Mechanical Specification :

- Case Material : Stainless and Zinc-Aluminum Alloy
- Strength : 250 Kgs and over

NOTE : The specification are subject to change without notice.

※ Door lock status.