

Door Hold Open Magnets

LOX[®]
LOCKING

LOX[®]

35000 SERIES

Wall or Floor Open Magnets

35770 + 35771 DESCRIPTION

The **LOX 35770+35771** Heavy duty door magnetic holder, with **50kg** holding force, titanium alloy surface finished, elegant appearance. When an alarm occurs, power is removed from the devices and the doors are returned to the closed condition. The devices come in **12** or **24VDC**.



35772 FLOOR MOUNT BOX



35770 & 35771
WALL HOLD OPEN MAGNETS

SPECIFICATIONS


35770	12VDC WALL MOUNT MAGNETIC DOOR HOLD OPEN
35771	24VDC WALL MOUNT MAGNETIC DOOR HOLD OPEN
35772	FLOOR MOUNT MAGNETIC DOOR HOLD OPEN BOX
HOLDING STRENGTH	UP TO 50KG
VOLTAGE/CURRENT	12VDC = 100mA 24VDC = 50mA  
ENVIRONMENTAL	OPERATIONAL TEMPERATURE RANGE - 20 DEG. C TO 60 DEG. C.



35000 SERIES

Wall or Floor Open Magnets

PRODUCT DIMENSIONS

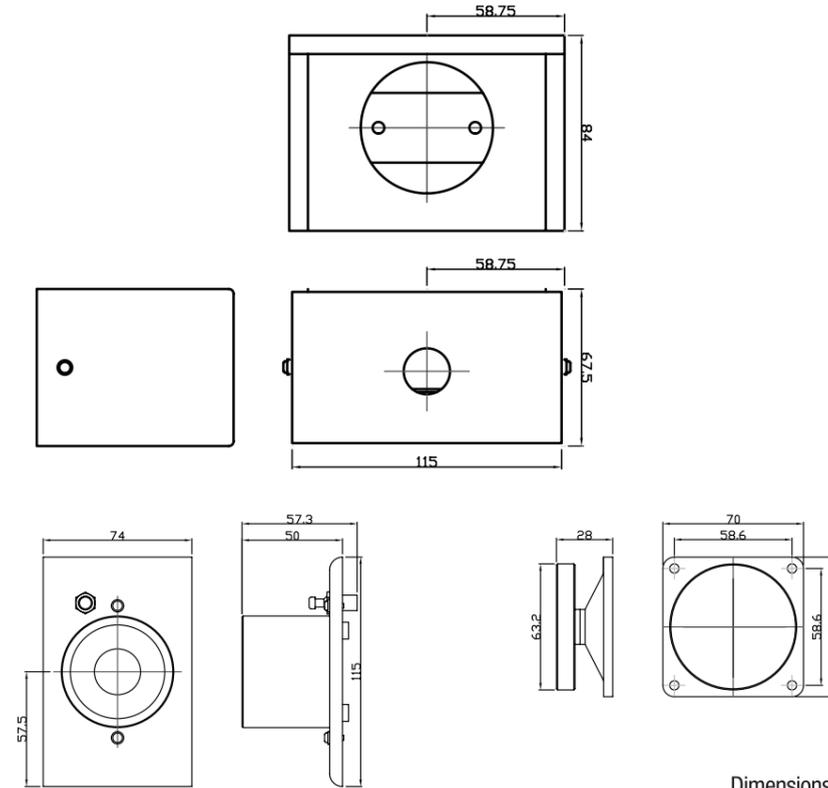

35770 + 35771 FACTS

- Up to 50kg holding force
- 12 and 24VDC options
- Floor mount and wall mount options



35000 SERIES

Wall or Floor Open Magnets with Extension

35770 EXTENSION DESCRIPTION

The **LOX 35770** Extension Series of Door Hold Open Magnets are multi-functional and dual voltage. The innovative swivel head allows the extension arm to be either straight for wall mount, or 90 degree for floor mounting. The operating voltage can be selected to either 12VDC or 24VDC by selector pins. The product comes in two versions, either **150mm** or **300mm**



35770 EXTENSION SERIES
150MM & 300MM WALL & FLOOR HOLD OPEN MAGNETS

SPECIFICATIONS

35770-150	150MM WALL OR FLOOR 90 DEGREE HOLD OPEN MAGNET
35770-300	300MM WALL OR FLOOR 90 DEGREE HOLD OPEN MAGNET
HOLDING STRENGTH	UP TO 50KG
VOLTAGE/CURRENT	DUAL VOLTAGE 12/24VDC 12VDC = 140mA 24VDC = 70mA
ENVIRONMENTAL	OPERATIONAL TEMPERATURE RANGE - 0 DEG. C TO 55 DEG. C.


LOX
LOCKING

LOX LOCKING PTY LTD | www.loxlocking.com.au

35000 SERIES

Wall or Floor Open Magnets with Extension

PRODUCT DIMENSIONS

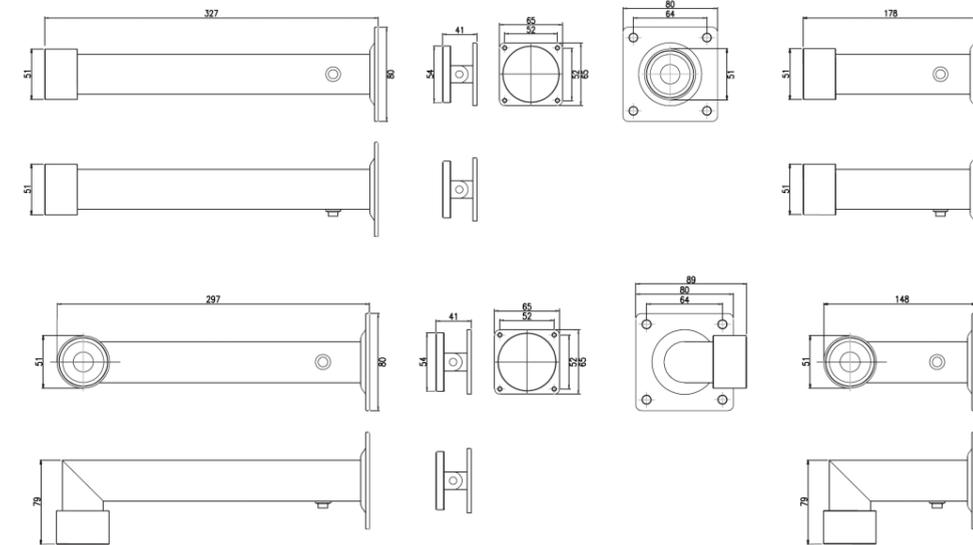

Dimensions (mm)

LOX
LOCKING

LOX LOCKING PTY LTD | www.loxlocking.com.au

35770 EXTENSION FACTS

- Dual Voltage 12 & 24VDC
- High holding force up to 50kgs
- Manual override release button
- Wall or floor mountable
- 150mm or 300mm lengths
- No residual magnetism

LOX[®]

LOX[®]